


integral spor™

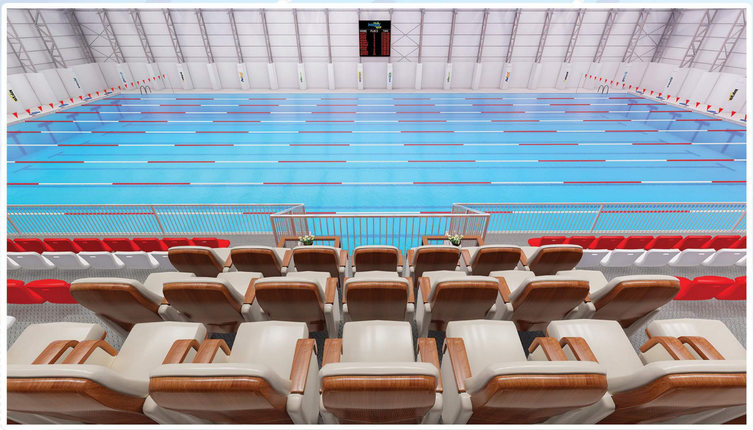

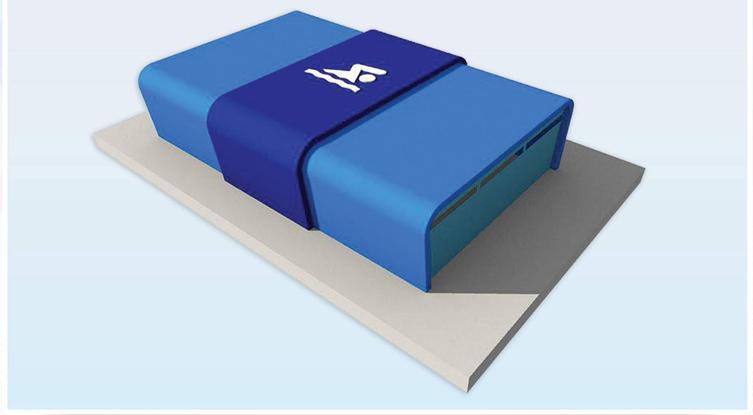

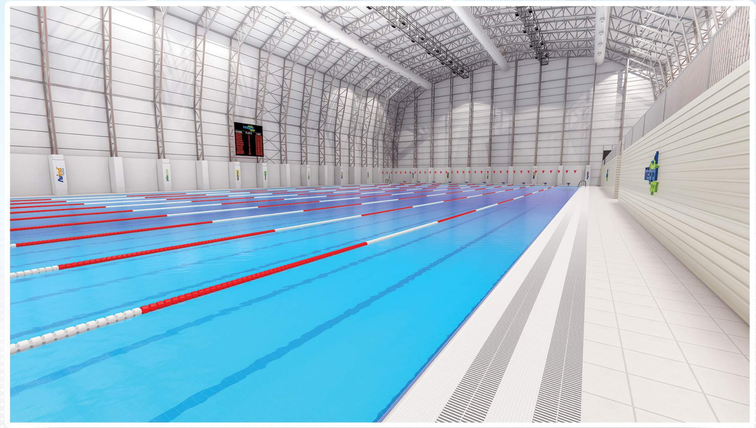

OLYMPIC SWIMMING POOL

500 Attendance Capacity

www.integralspor.com

INDEX

1 - ROUGH CONSTRUCTION

1.a Execution of necessary excavation, ground arrangement, concrete, iron and mold works for the construction of the Olympic swimming pool.
1.b Execution of excavation, ground arrangement, concrete, iron and mold works required for engine room construction
1.c Execution of the necessary reinforced concrete flooring for the tribune construction
1.d Execution of the necessary reinforced concrete flooring for the construction of walking paths around the pool

2 - FLOOR COATING WORKS

2.a Implementing pool floor covering using 12.50 x 25.00 cm sized ceramic
2.b Implementing a handle ceramic by the pool
2.c Implementing ceramic works inside the canal
2.d Implementing ceramic works for walkways
2.d Implementing screed and plaster works

3 - STEEL CONSTRUCTION AND GRANDSTAND WORKS

3.a Implementing galvanized steel construction roof system
3.b Building exterior cladding using sandwich panels
3.c Implementing galvanized-coated steel construction tribune using a fixed-backed audience seat.
3.d Implementing galvanized steel construction tribune using the protocol seat

4 - BUILDING LIVING AREAS

4.a Building fitness center
4.b Implementing a sauna
4.c Building sports dressing room
4.d Building restrooms
4.e Building Office Areas
4.f Building information desk area

5 - EQUIPMENT WORKS

5.a Lane separator
5.b Seperator winding car
5.c Return warning set
5.d Wrong jump alert
5.e Return panel
5.f Pool robot
5.g Lifeguard / referee seat
5.h Safetybuoy
5.i Judge and lifesaver
5.j Jumping platform
5.k Stainless steel ladder
5.l Building a led scoreboard

6 - MECHANICAL INSTALLATION WORKS


6.a Pvc pipe materials
6.b Pool pump
6.c Sand filter
6.d Quartz sand
6.e Dosing pumps
6.f Plate Heat Exchanger
6.g Overflow channel gratings
6.h Dip grill
6.i Valve and check-valve materials
6.j Pool heat pump
6.k Pool heat pump board

7 - LIGHTING AND VENTILATION WORKS

7.a Lighting system with 500 lux / 1,000 lux / 1,500 lux lighting levels
7.b Making catwalk for the lighting system
7.c Spiral clamped ventilation duct
7.d Jet nozzle
7.f Suction grille
7.g Ventilation unit

8 - LANDSCAPE WORKS

8.a Parking area
8.b Perimeter wall
8.c Panel fence
8.d Landscaping works
8.e Building the entrance gate

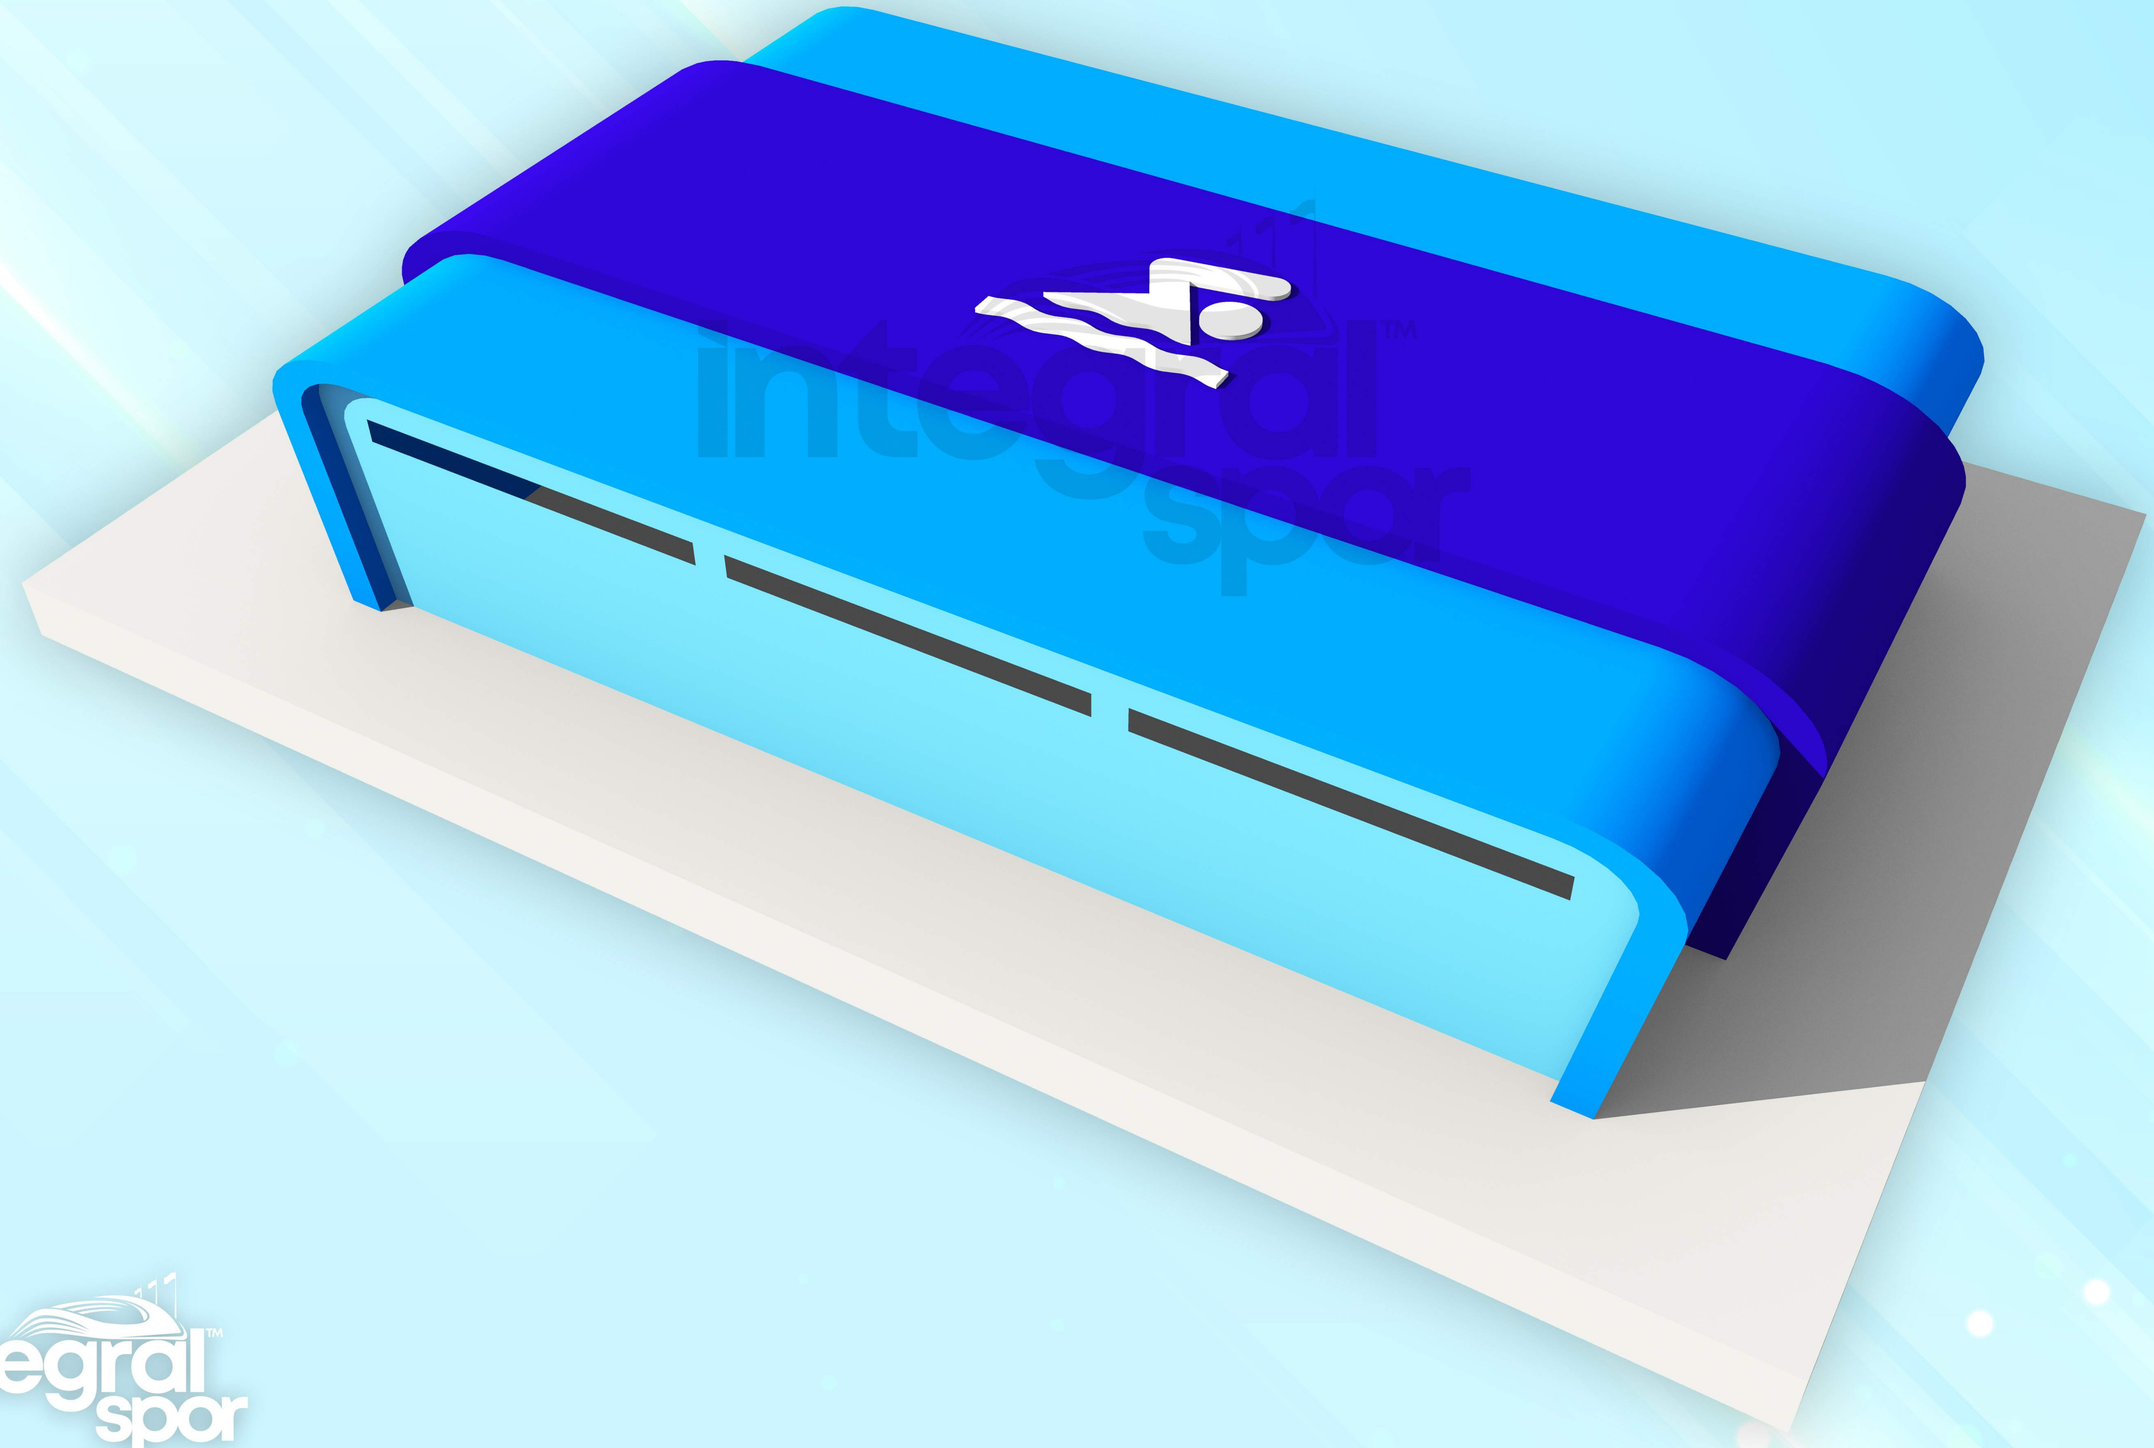


1 - INFRASTRUCTURE WORKS


1.250 m²	Execution of necessary excavation, ground arrangement, concrete, iron and mold works for the construction of the **Olympic swimming pool.**
360 m²	Execution of excavation, ground arrangement, concrete, iron and mold works required for **engine room** construction.
360 m²	Execution of the necessary reinforced concrete flooring for the **tribune construction**.
475 m²	Execution of the necessary reinforced concrete flooring for the construction of **walking paths** around the pool.


2 - FLOOR COATING WORKS

1.610 m^2	Implementing pool floor covering using 12.50 x 25.00 cm sized **ceramic**
155 mt	Implementing a handle **ceramic** by the pool
315 mt	Implementing ceramic works inside the canal
475 m^2	Implementing ceramic works for walkways
1 GROUP	Implementing screed and plaster works

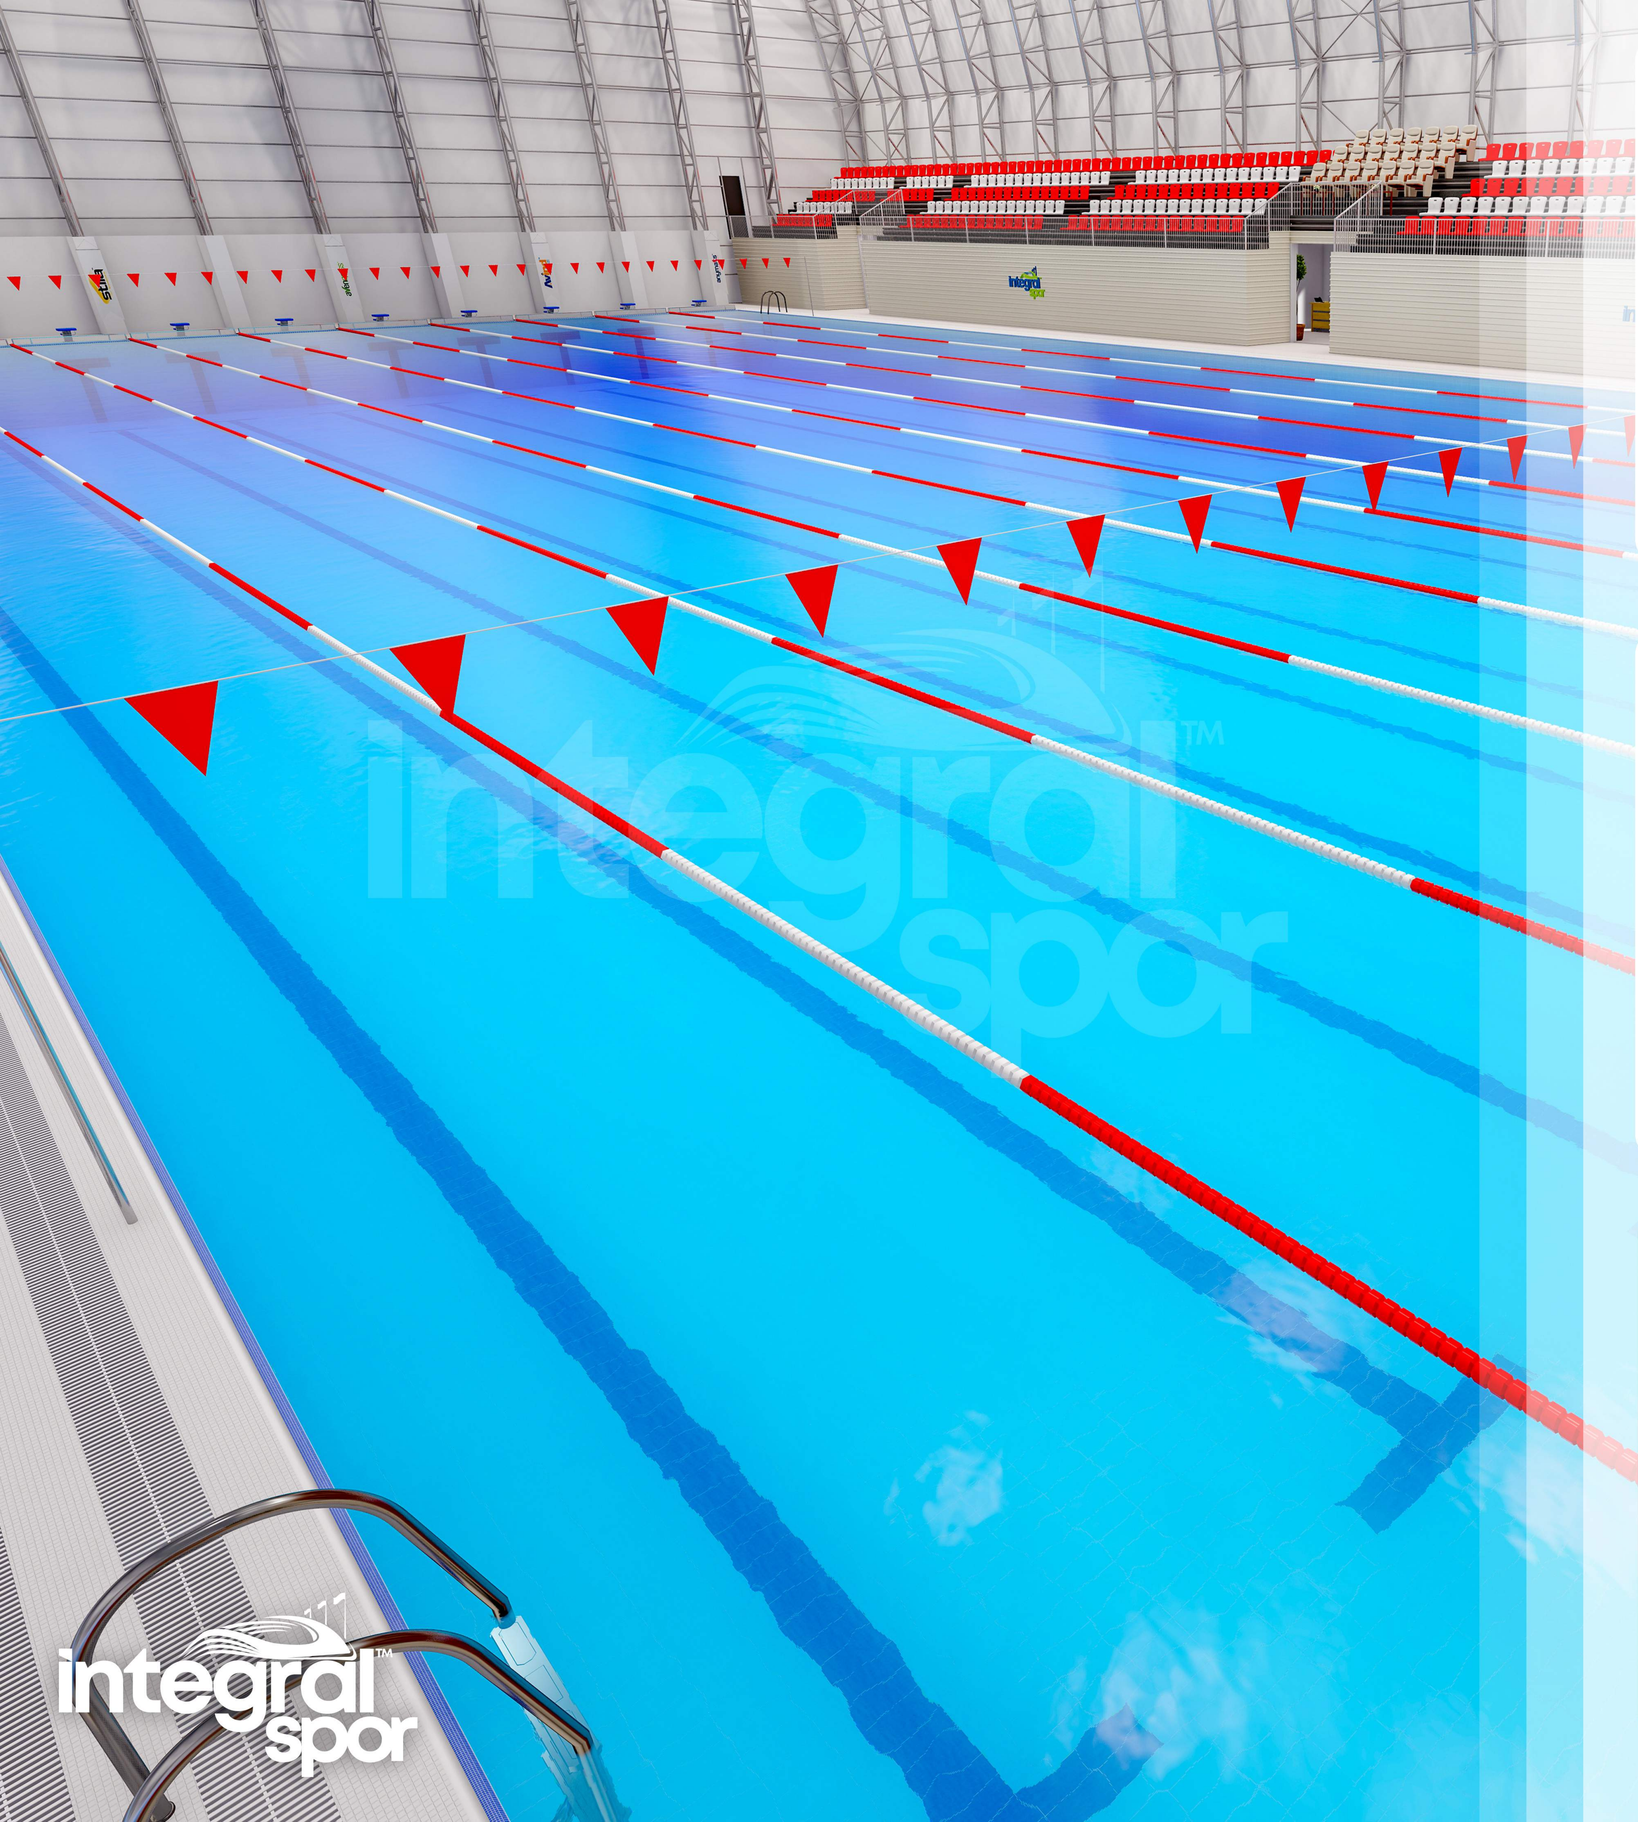



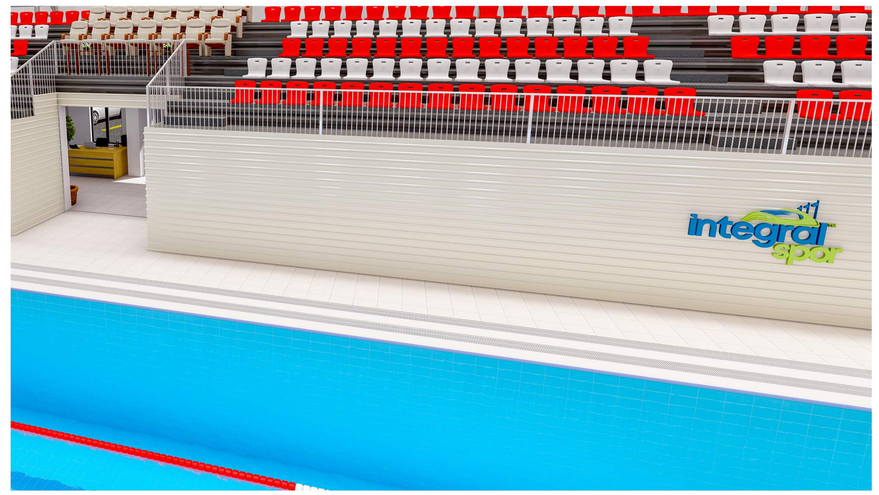

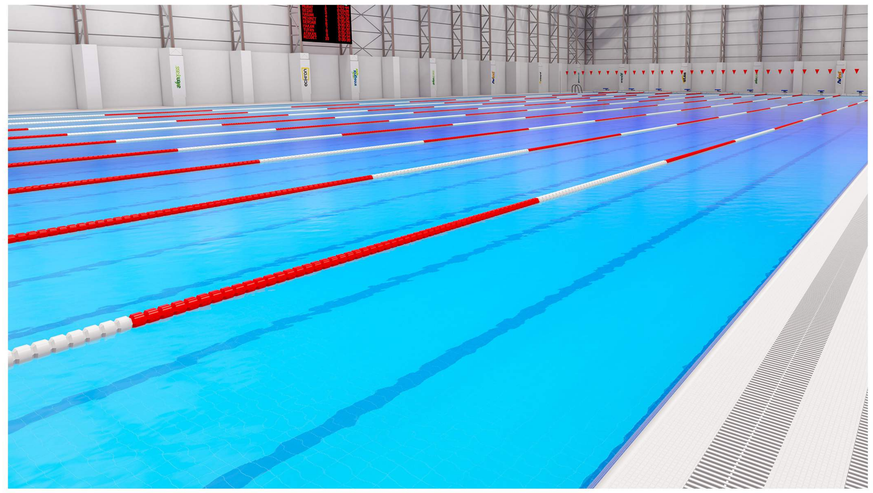

3 - STEEL CONSTRUCTION AND GRANDSTAND WORKS



2100m² STEEL ROOF

Implementing galvanized steel construction roof system




1 PIECE LED SCREEN

Implementing a led scoreboard



450 CAPACITY


Implementing galvanized-coated steel construction tribune using a fixed-backed audience seat.

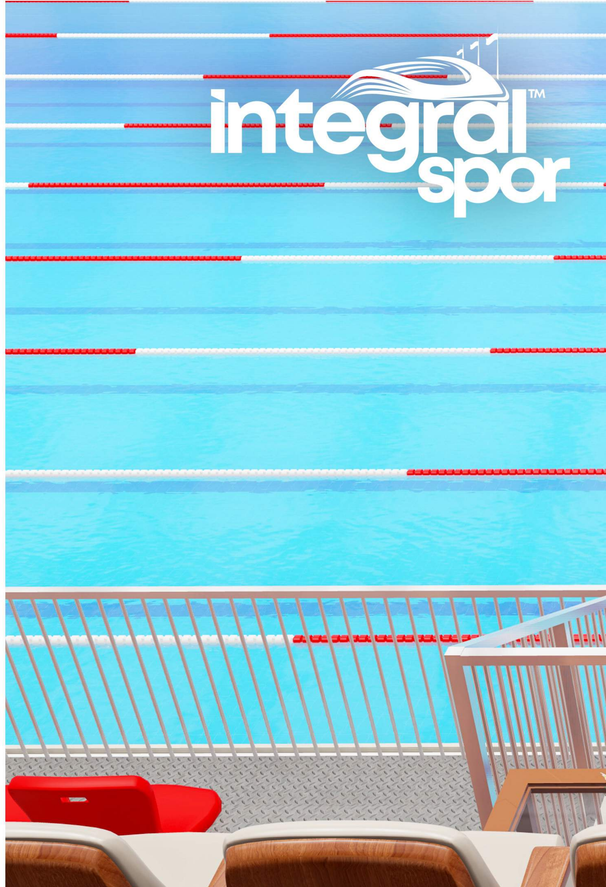

50 CAPACITY

Implementing galvanized steel construction tribune using the protocol seat




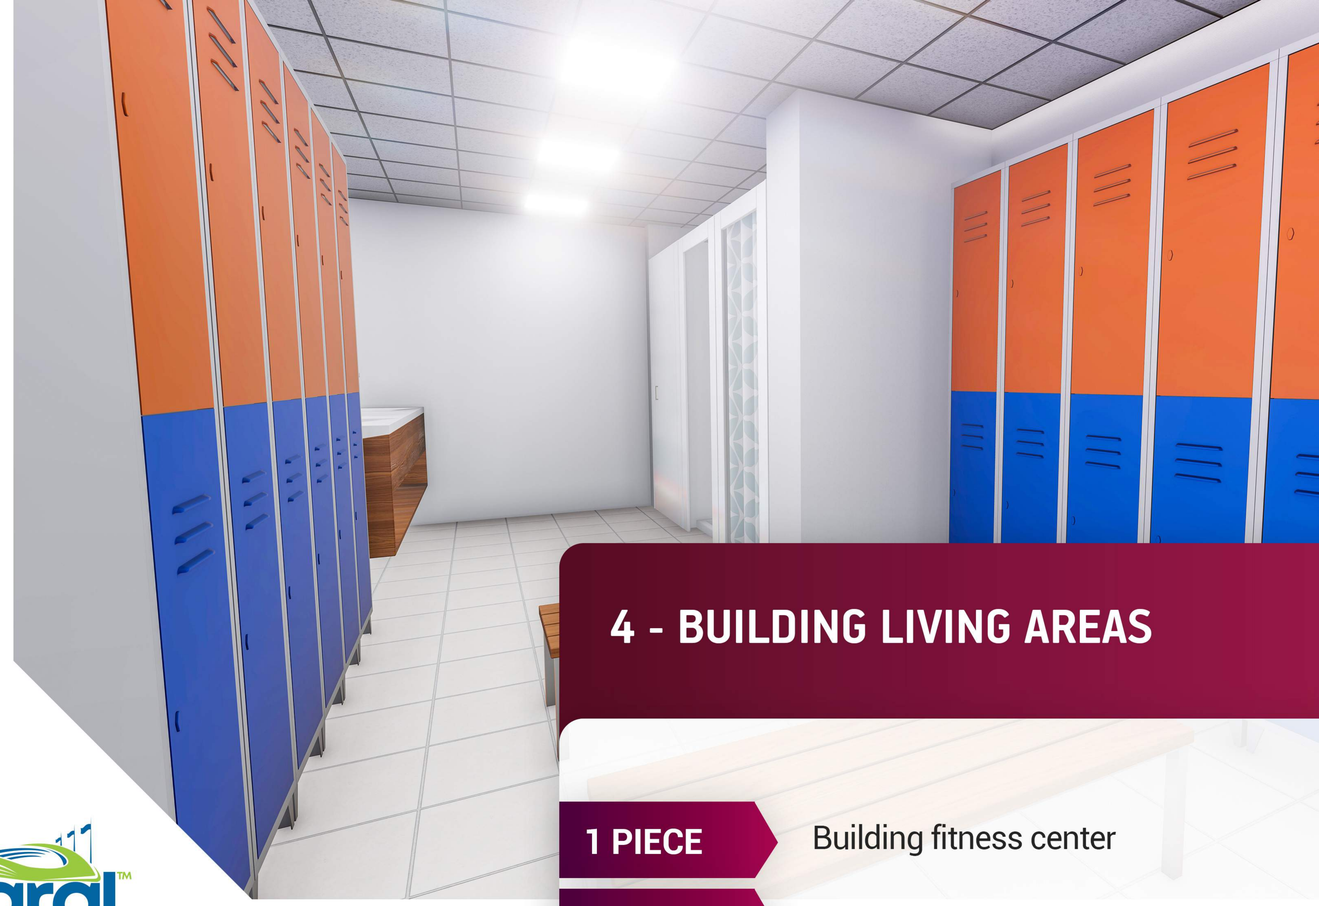

4 - BUILDING LIVING AREAS

1 PIECE	Building fitness center
1 PIECE	Implementing a sauna
2 PIECES	Building sports dressing room
4 PIECES	Building restrooms
1 PIECE	Building Office Areas
1 PIECE	Building information desk area



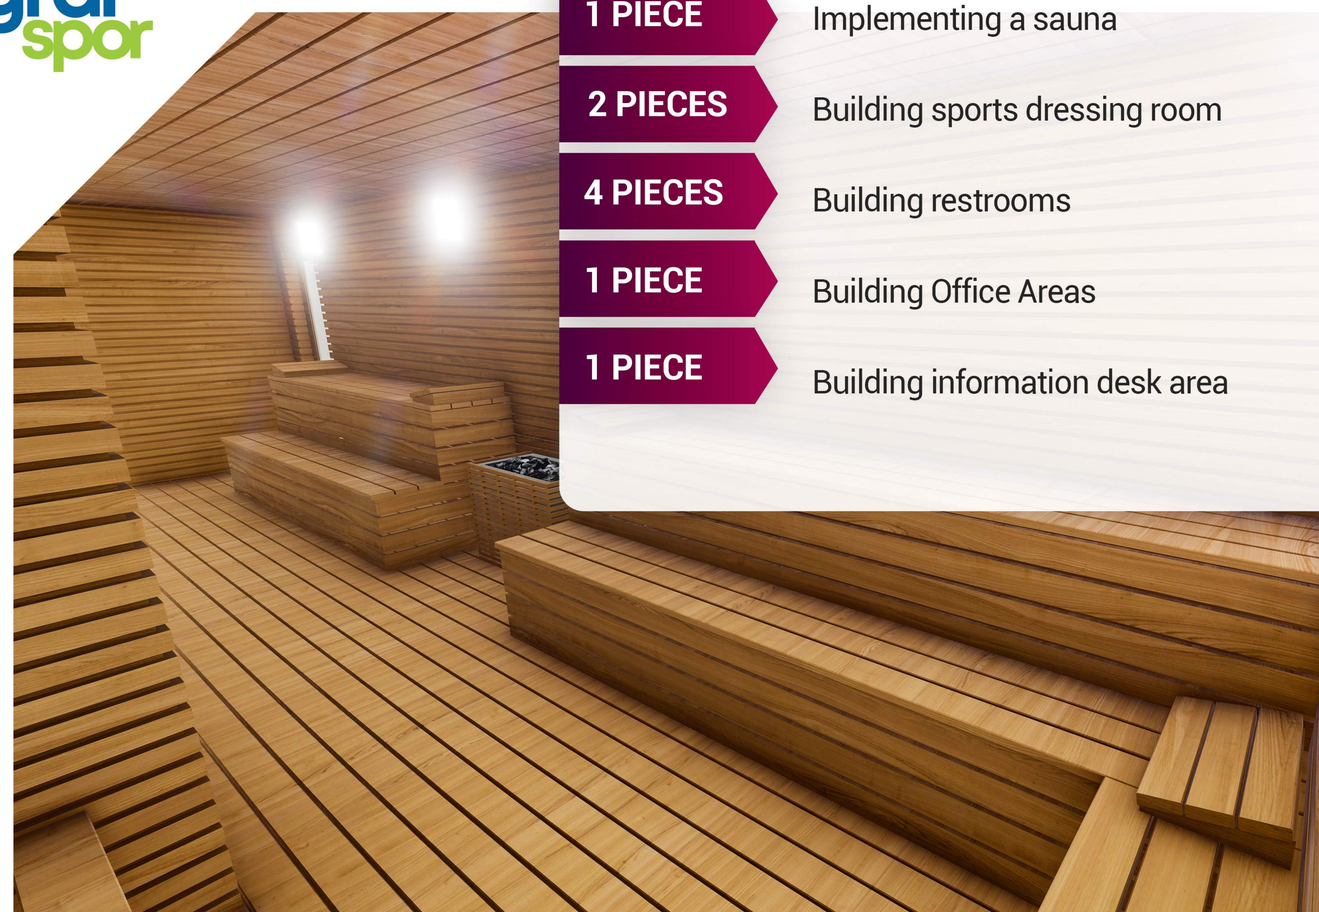

ADMINISTRATION OFFICES



integral spor™

DRESSING ROOMS

integral spor

FITNESS

FITNESS CENTER

integral spor

SAUNA

5 - EQUIPMENT WORKS


9 PIECES	Lane separator
3 PIECES	Seperator winding car
2 PIECES	Return warning set
1 PIECE	Wrong jump alert
20 PIECES	Return panel
1 PIECE	Pool robot
2 PIECES	Lifeguard / referee seat
6 PIECES	Safetybuoy
4 PIECES	Judge and lifesaver
10 PIECES	Jumping platform
4 PIECES	Stainless steel ladder
1 PIECE	Building a led scoreboard


6 - MECHANICAL INSTALLATION WORKS

1 GROUP	Pvc pipe materials
6 PIECES	Pool pump
6 PIECES	Sand filter
36 TON	Quartz sand
4 PIECES	Dosing pumps
2 PIECES	Plate Heat Exchanger
1 SET	Overflow channel gratings
9 PIECES	Dip grill
1 SET	Valve and check-valve materials
OPTIONAL	Pool heat pump
OPTIONAL	Pool heat pump board


7 - LIGHTING AND VENTILATION WORKS




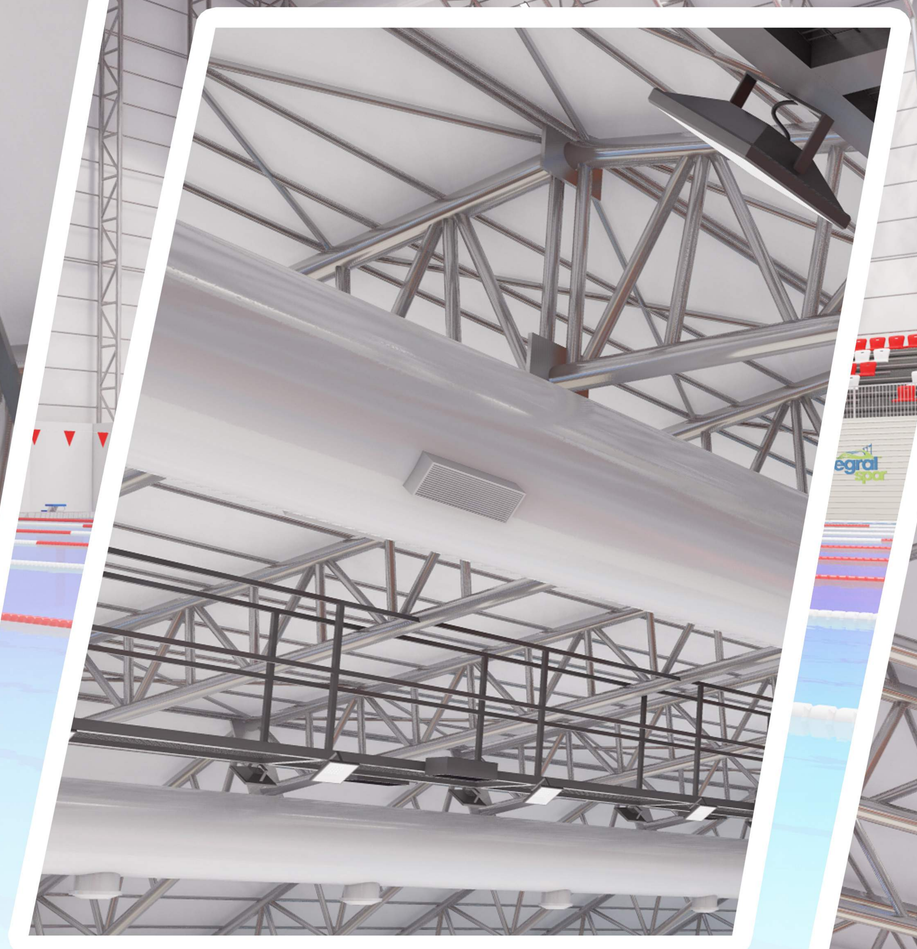


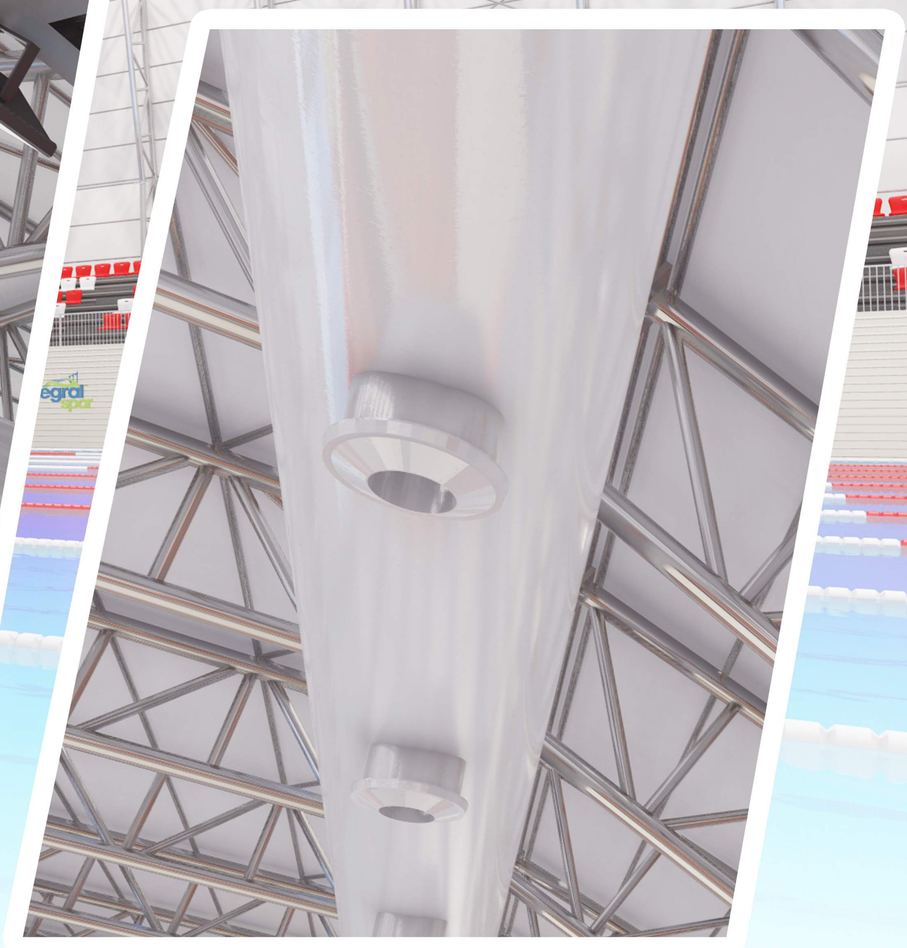

1 GROUP	Lighting system with 500 lux / 1,000 lux / 1,500 lux lighting levels
1 GROUP	Making catwalk for the lighting system
190 mt.	Spiral clamped ventilation duct
18 PIECES	Jet nozzle
9 PIECES	Suction grille
1 PIECE	Ventilation unit

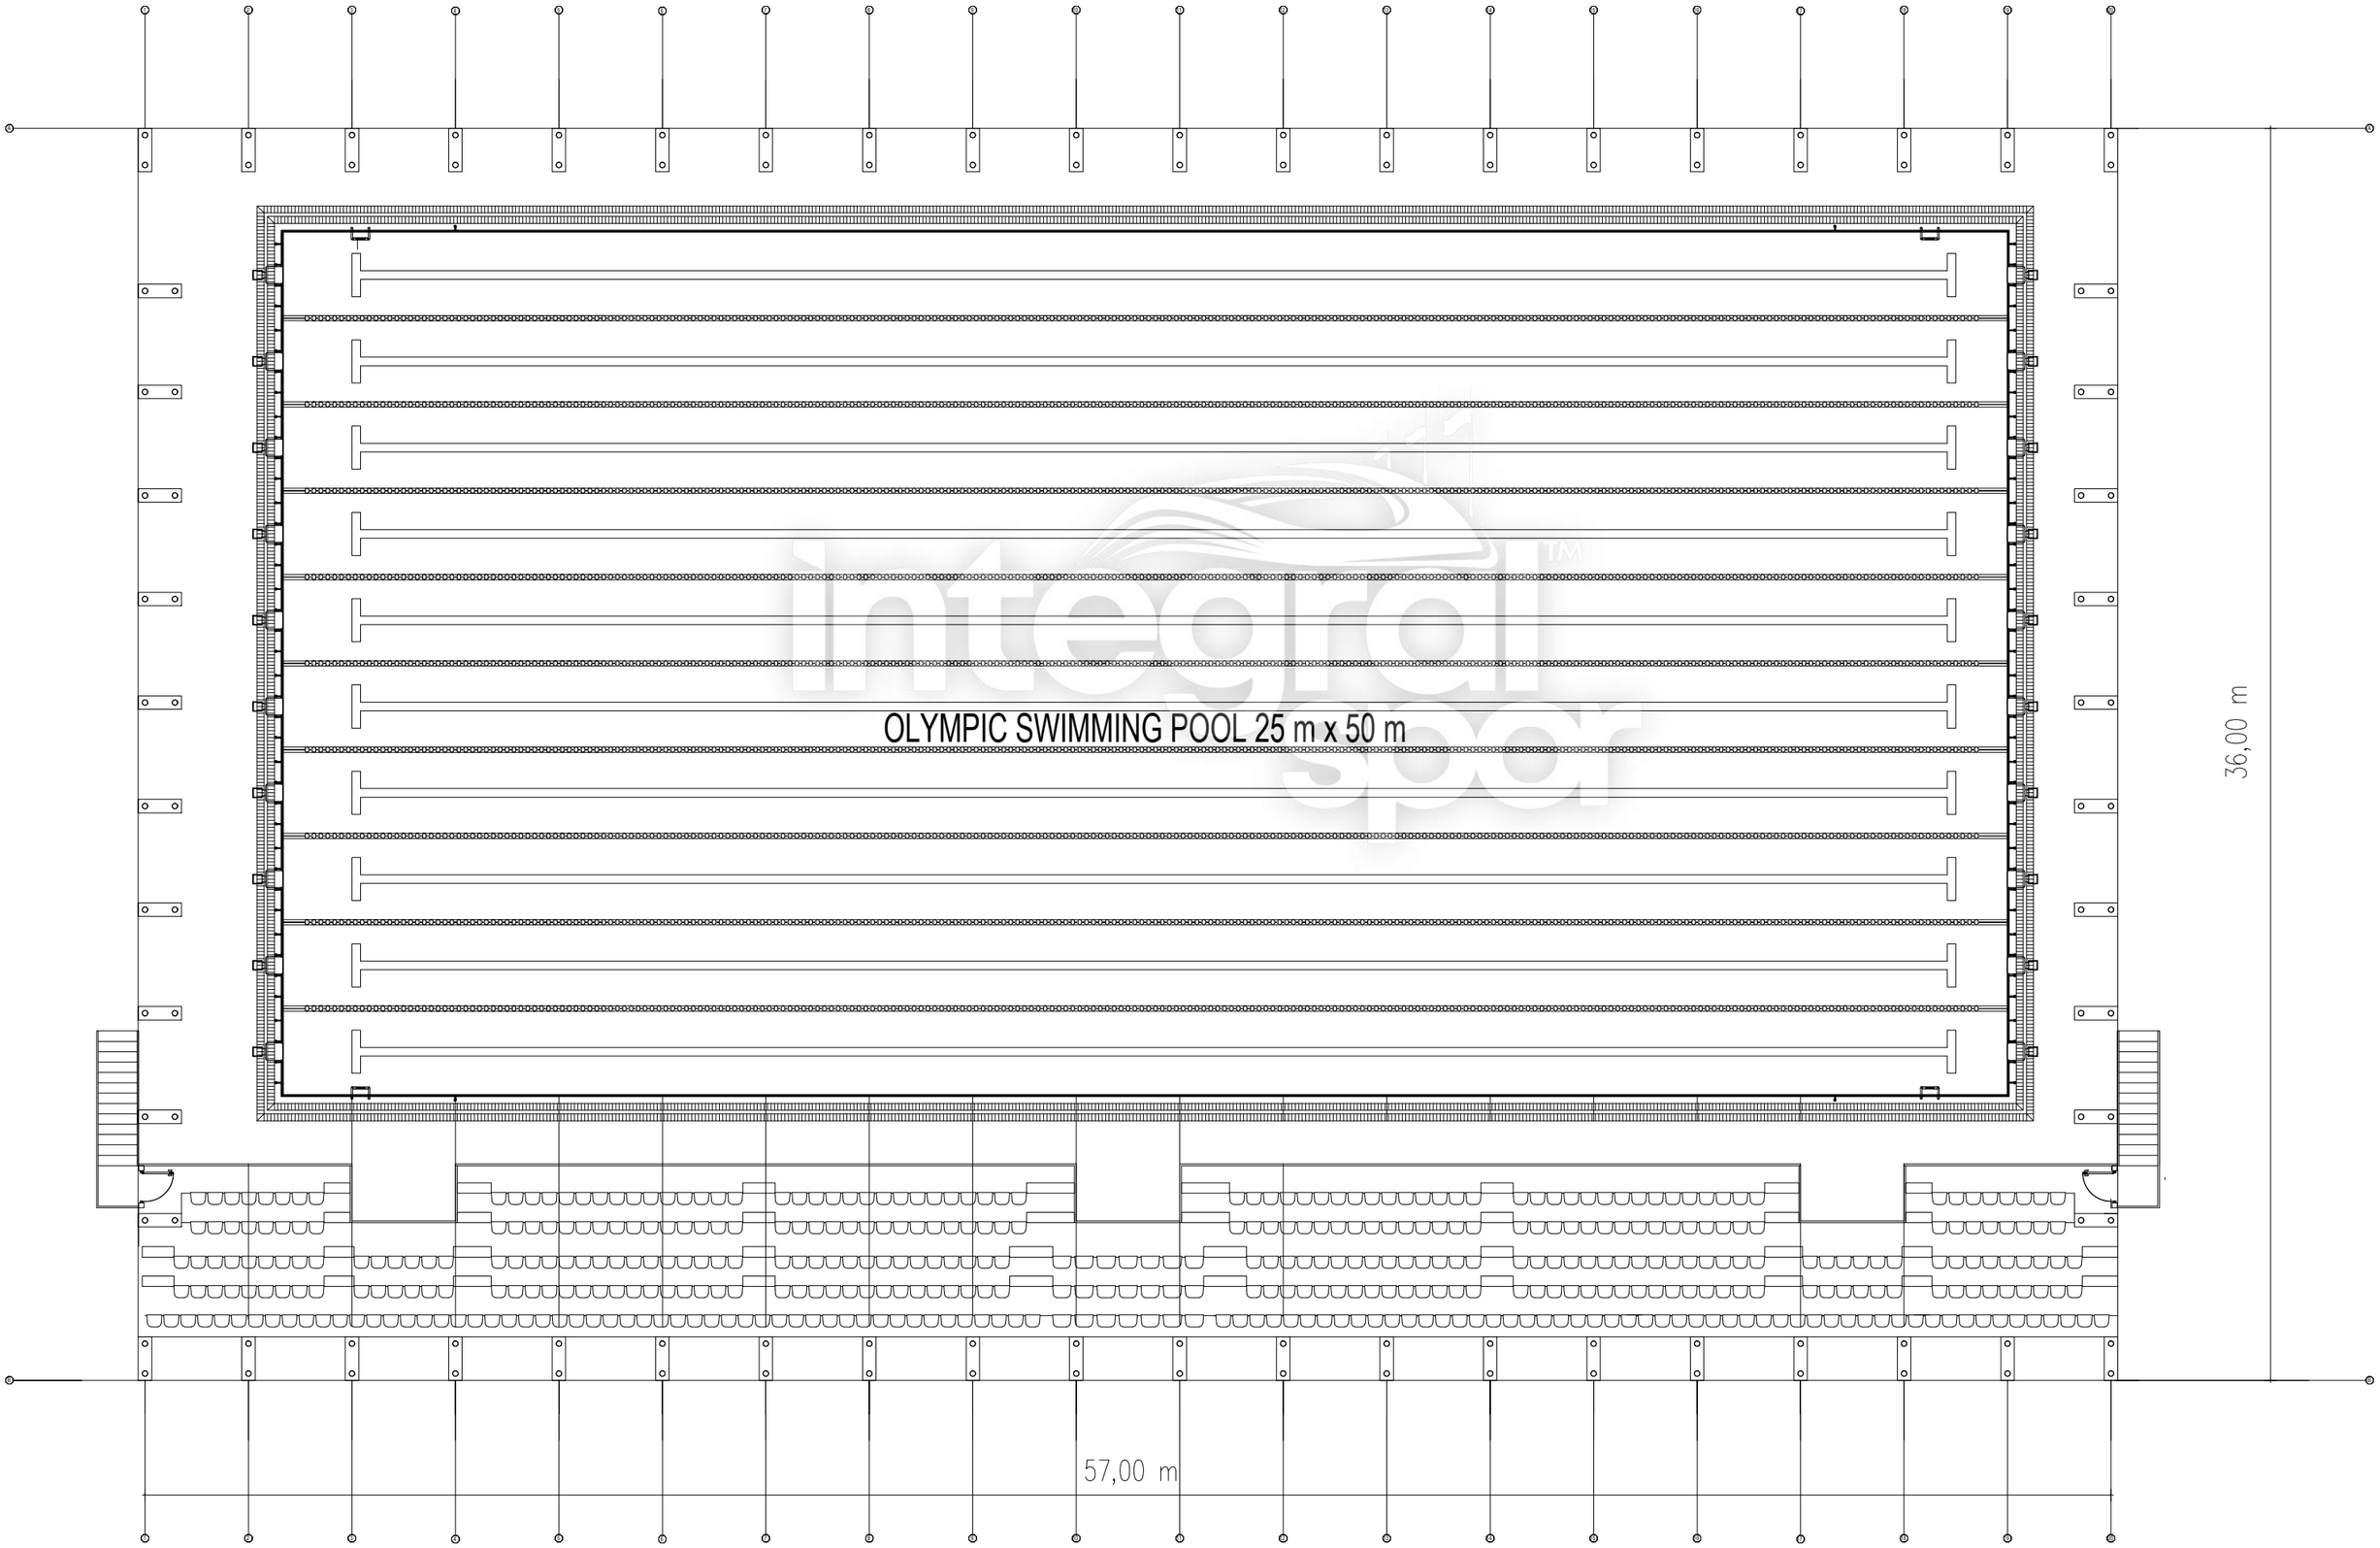
OLYMPIC SWIMMING POOL 25 m x 50 m
36,00 m
57,00 m

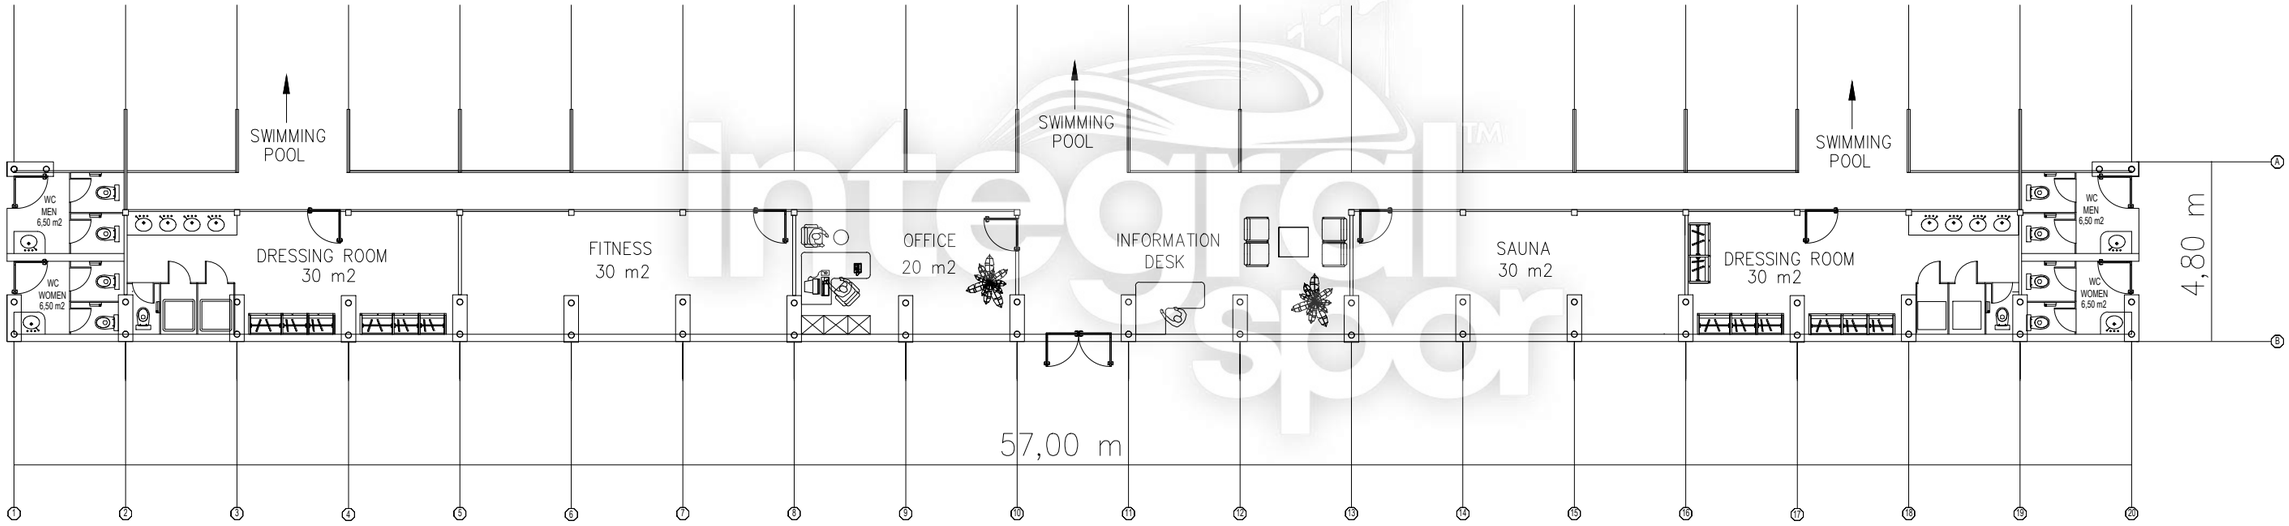
SWIMMING POOL
SWIMMING POOL
SWIMMING POOL
WC MEN 6,50 m2
WC WOMEN 6,50 m2
DRESSING ROOM 30 m2
FITNESS 30 m2
OFFICE 20 m2
INFORMATION DESK
SAUNA 30 m2
DRESSING ROOM 30 m2
WC MEN 6,50 m2
WC WOMEN 6,50 m2
4,80 m
57,00 m
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20
A
B

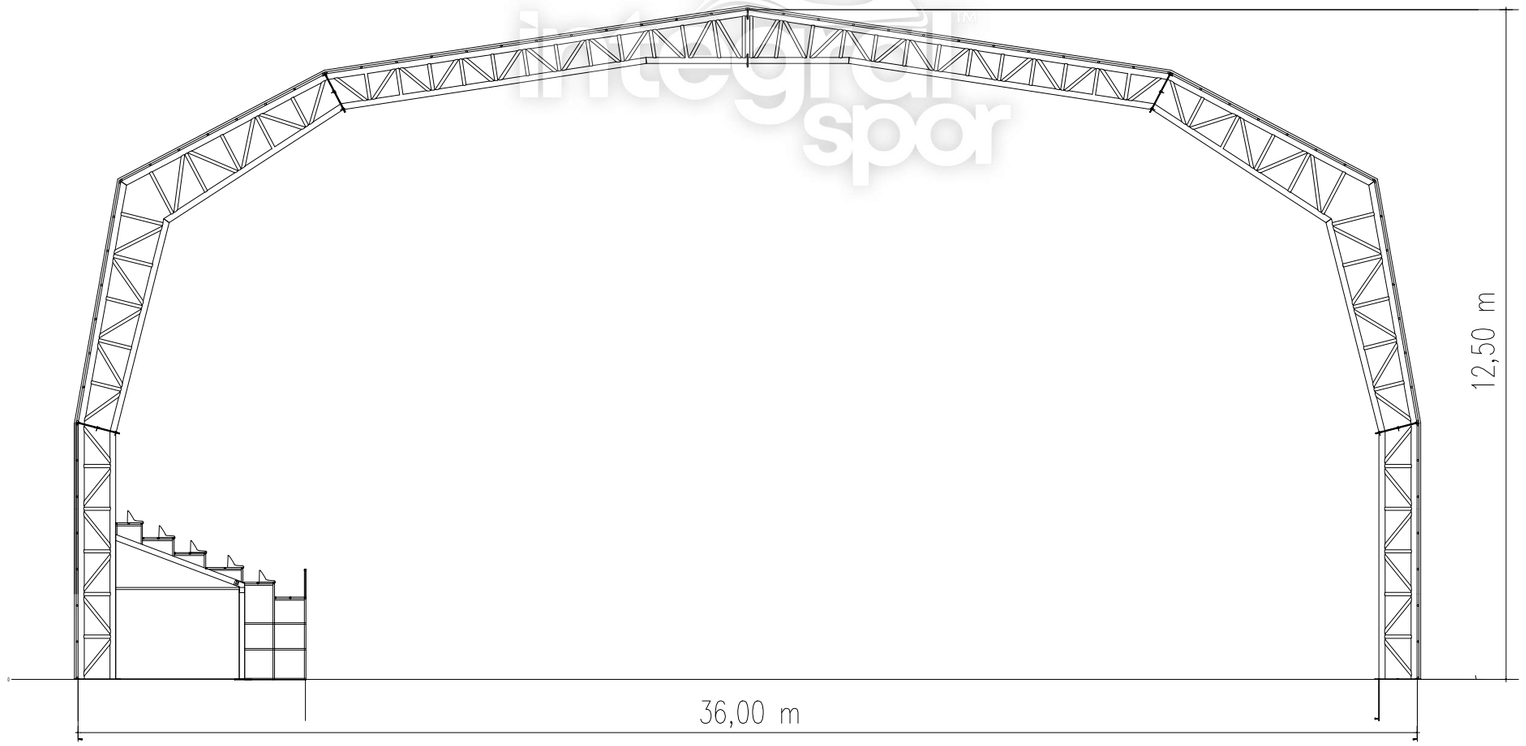
12,50 m
36,00 m

OTHER PROJECTS

For More Informations : www.integralspor.com

STADIUM PROJECT

10.000 Attendance Capacity



MULTI PURPOSE SPORTS FACILITY

2.000 Attendance Capacity





TURKEY
HEAD OFFICE

Metro 34 Plaza
No: 23/70 IOSB
Bedrettin Dalan Bulvarı
Başakşehir / İstanbul

+90 212 678 13 13
info@integralgroup.com.tr

USA
OFFICE

250 Park Avenue,
7th floor, New York,
New York, NY 10177

+1 212-572-4897
newyork@integralgroup.com.tr

UK
OFFICE

Lewisham High
Street 1st floor,
Romer House,
Londra SE13 6EE

+442081755190
london@integralgroup.com.tr

QATAR
OFFICE

Shoumoukh Tower, 10th floor,
Tower B, C –Ring Road, Al Sadd
Doha, Qatar, P.O Box 55896

+974-4007-5198
doha@integralgroup.com.tr

RUSSIA
OFFICE

Business Centre LLC;
121099, Moscow;
Smolenskaya sq.3

+7 495 937 8215
moskow@integralgroup.com.tr

INDONESIA
JAKARTA

Ariston Platinum Cluster Boulevard,
Blok C 19 Kelurahan Jatimulya,
Kecamatan Cilodong, Kota Depok,
Jawa Barat Post Code 16413

+62 812 96960296
indonesia@integralgroup.com.tr

TURKEY
FACTORY

Velimese Mah.
Baraj Yolu
Kume Evler No: 7
Ergene / Tekirdağ

+90 212 678 13 13
factory@integralgroup.com.tr

www.integralgroup.com.tr [/integralgroupglobal /integralgroup]